


3,7W FLOOR HEATING CABLE WITH FLOOR GUIDES

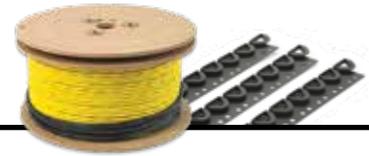

120 Volts

Refer to page 3 for installation under soft surfaces.

Model	Length		Spacing (ft ²)		Power Output			Guides	CND Price
	ft.	m.	3" 14,8 W	ARDEX FLEXBONE, PROVAHEAT 4" 11,1 W	Watt	Amp	Ohms		
3,7GCWC-120V-05	16,5	5,05	4,1	5,5	60	0,5	240,0	10	
3,7GCWC-120V-10	33,0	10,1	8,3	11,0	120	1,0	120,0	10	
3,7GCWC-120V-14	49,5	15,1	12,4	16,5	180	1,5	80,0	15	
3,7GCWC-120V-19	66,0	20,1	16,5	22,0	240	2,0	60,0	20	
3,7GCWC-120V-24	82,5	25,1	20,6	27,5	300	2,5	48,0	20	
3,7GCWC-120V-29	99,0	30,2	24,8	33,0	360	3,0	40,0	20	
3,7GCWC-120V-34	115,5	35,2	28,9	38,5	420	3,5	34,3	30	
3,7GCWC-120V-38	132,0	40,2	33,0	44,0	480	4,0	30,0	30	
3,7GCWC-120V-43	148,5	45,3	37,1	49,5	540	4,5	26,7	30	
3,7GCWC-120V-48	165,0	50,3	41,3	55,0	600	5,0	24,0	40	
3,7GCWC-120V-58	198,0	60,4	49,5	66,0	720	6,0	20,0	40	
3,7GCWC-120V-67	231,0	70,4	57,8	77,0	840	7,0	17,1	50	
3,7GCWC-120V-77	264,0	80,5	66,0	88,0	960	8,0	15,0	50	
3,7GCWC-120V-87	297,0	90,5	74,3	99,0	1080	9,0	13,3	60	
3,7GCWC-120V-96	330,0	100,6	82,5	110,0	1200	10,0	12,0	60	
3,7GCWC-120V-106	363,0	110,6	90,8	121,0	1320	11,0	10,9	60	
3,7GCWC-120V-115	396,0	120,7	99,0	132,0	1440	12,0	10,0	70	
3,7GCWC-120V-125	429,0	130,8	107,3	143,0	1560	13,0	9,2	70	
3,7GCWC-120V-135	462,0	140,8	115,5	154,0	1680	14,0	8,6	80	
3,7GCWC-120V-144	495,0	150,9	123,8	165,0	1800	15,0	8,0	80	



APPLICATIONS

- Complete house
- Basement
- Garage | Pool
- Glass house-Solarium
- Animal building
- Commercial building

Compatible with most smart home systems.